

# 1500 MAXTRAK

The Powerscreen® 1500 Maxtrak is one of the largest mobile cone crushers on the market. Specifically developed for larger users, The plant can accept an all in feed from a primary crusher and has been specifically developed for operators processing large volumes of material.

With the Powerscreen® 1500 Automax® cone crusher, operators benefit from hydraulic overload protection, a large throughput, excellent product cubicity and a high reduction ratio.

**Features & Benefits**

- Renowned Automax® crusher technology
- Excellent product shape
- Accepts clean all in feed
- High reduction ratio
- Cone feed box level control to maintain choke feeding
- Hydraulic crusher setting
- Cone overload protection
- Heavy duty chassis and track frame
- Large feed hopper with folding sides, wear resistant liners and crash box
- Feed conveyor folds for maintenance, remove for transport
- Metal detector comes with contaminated material dump facility
- Dust suppression system
- Electric refuelling pump
- Plant lighting
- User friendly and intelligent PLC control system
- Economical to operate with a fuel efficient direct crusher drive via wet clutch
- Fitted with Powerscreen Pulse Telematics system

**Options**

- Fine concave
  - Product conveyor belt weigher
  - Hydraulic water pump
  - Radio remote control
  - Crusher mounted camera – displayed on control panel
- Feed conveyor transported separately.  
Weight 12,000kg (26460lbs)

**Applications**

- Sand & gravel
- Blasted rock
- River rock
- C & D waste
- Foundry waste
- Processed ores
- Processed minerals

**Product Conveyor**

Width: 1400mm (55")  
Discharge height: 4.65m (15'3")  
Dust suppression

**Crusher**


Automax® cone crusher with all roller bearing design  
Size (head diameter): 1500mm (59")  
Concave standard: Coarse  
Min CSS: 35mm (1.4")\*  
Max CSS: 64mm (2.5")\*

**Feed Conveyor**

Width: 1500mm (59")  
Over and under belt metal detector

**Hopper**

Wear resistant feed hopper with crash bars  
Length: 3.3m (10'10")  
Width: 4.25m (13'11")  
Capacity: 9m³ (11.8yds³)

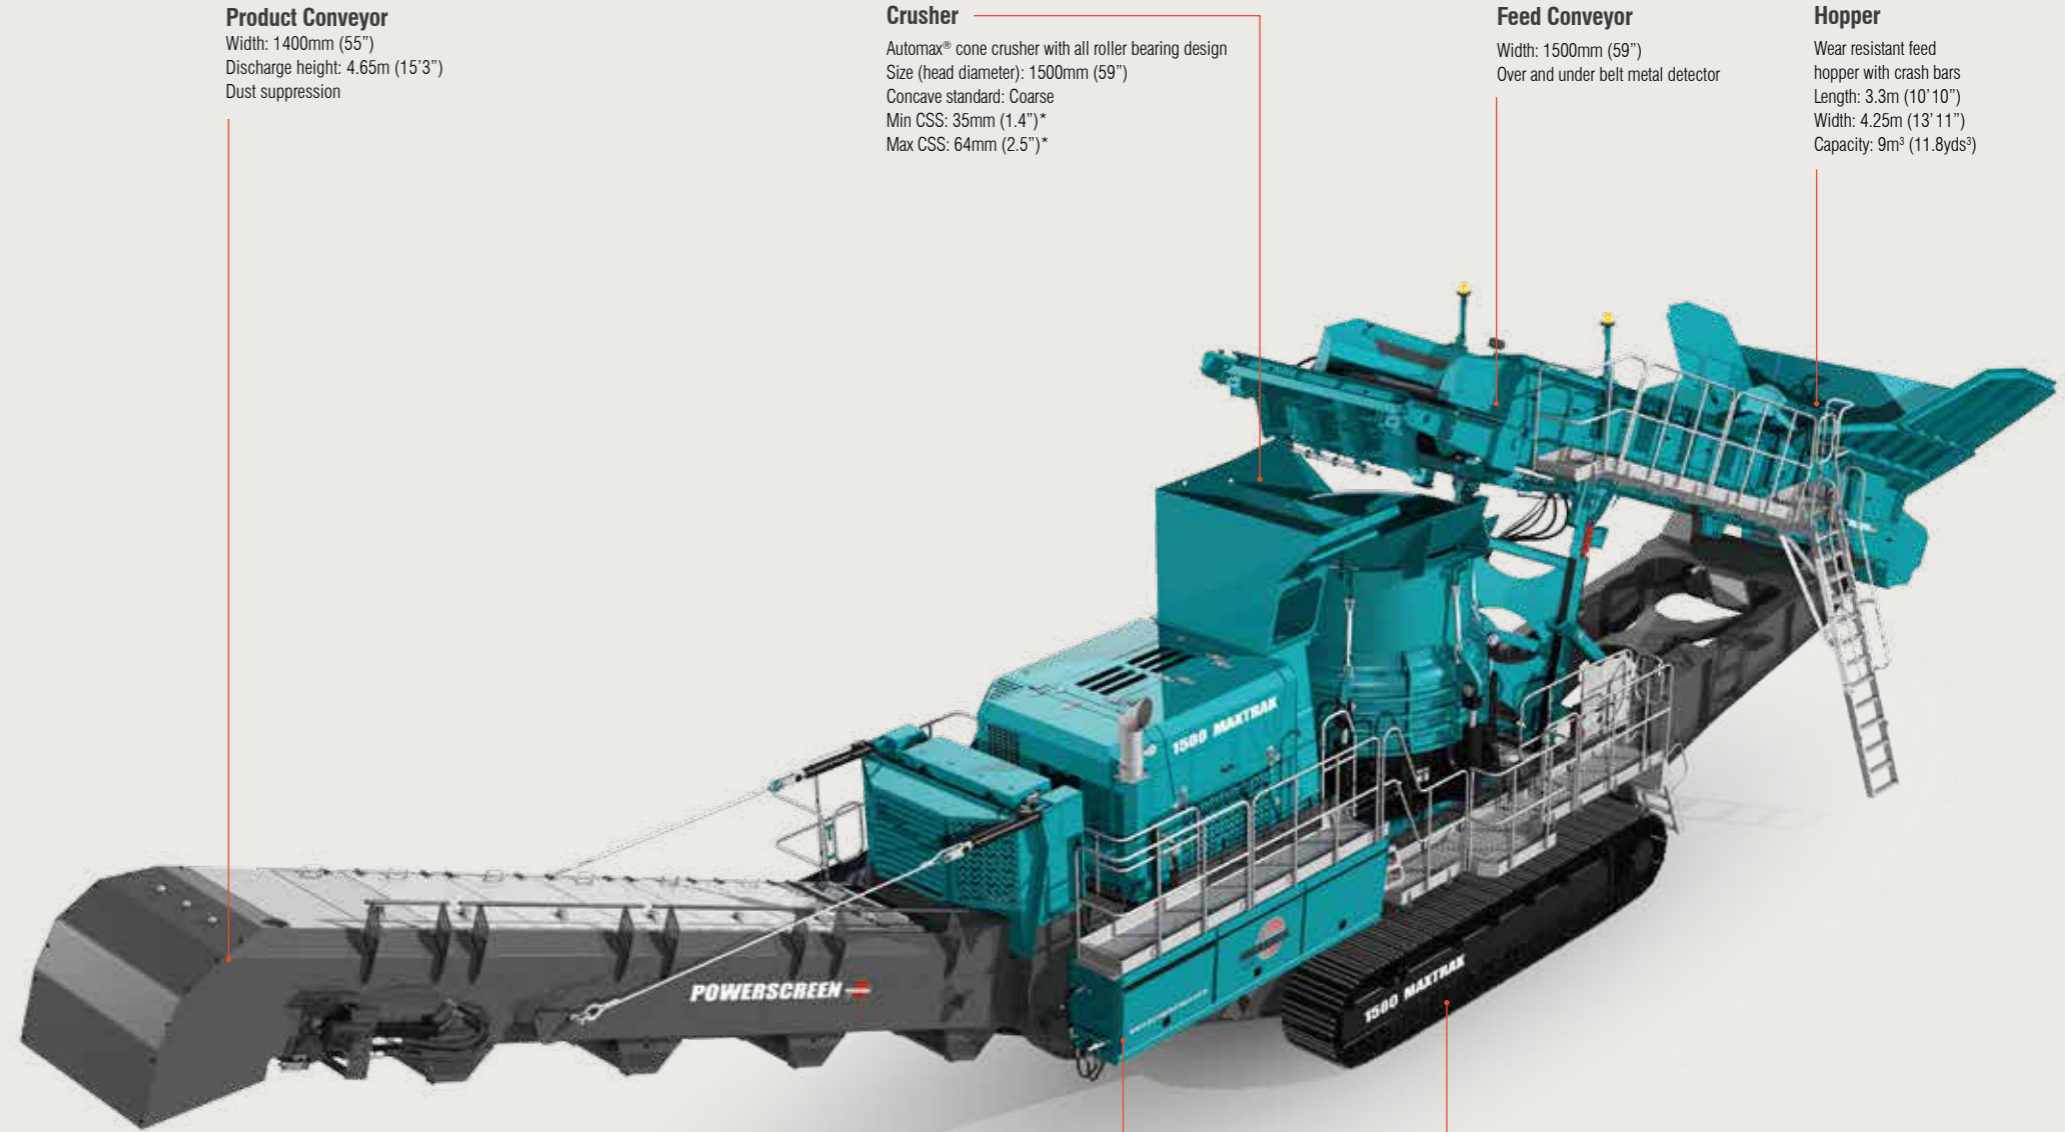

**Power Unit**

Tier 3/Stage 3A:  
CAT C18 ACERT 470kW (630hp)  
Fuel tank capacity: 1000 L (264 US Gal)

**Tracks**

Width: 600mm (24")

**1500 MAXTRAK**

Weight (Est)	89,000kg (196,211lbs)
Transport width	3.5m (11'6")
Transport length	22m (72'6")
Transport height	3.85m (12'8")
Working width	5.1m (16'9")
Working length	23.9m (79'9")
Working height	6.2m (20'8")



\*Depends on application  
Engines are available that are certified to US EPA and EU off road diesel emission standards. Talk to your dealer about possible certification options (i.e. Tier 3/Stage 3A, Tier 4/Stage 3B, Tier 4F / Stage 4).

Engines are available to meet US EPA emission standards under CFR 1039.625 and EU Flexibility provisions of Directive 97/68/EC

